


PC Male Straight (Metric Tubing, PT, R, BSPT Thread)

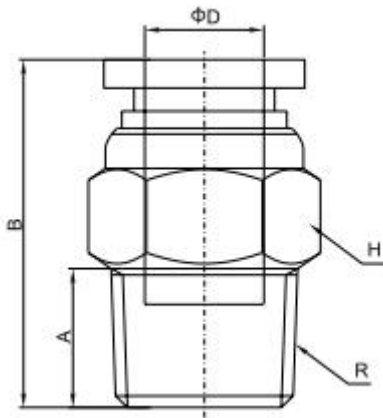

Material: Nickel Plated Brass
Fluid Admitted: Air, Vacuum, Water(no freezing)
Working Pressure: 0~1.0MPa | 0~150psi
Proof Pressure: 3.0Mpa | 435psi
Negative Pressure: -100Kpa | -29.5 In Hg
Working Temperature: 0~60°C | 32~104°F
Applicable Tube: PU / PA / PE / PVC
Seal, O-ring: NBR

[mm]					
Model	ØD	R	A	B	H
PC 04-M5	4	M5	4.5	20.5	10
PC 04-M6		M6	4.5	20.5	10
PC 04-01		R1/8	7	19	10
PC 04-02		R1/4	9.5	19	14
PC 06-M5	6	M5	4.5	22	12
PC 06-M6		M6	4.5	22	12
PC 06-01		R1/8	7	20	12
PC 06-02		R1/4	9.5	21	14
PC 06-03		R3/8	10	21	17
PC 06-04		R1/2	13	24	21
PC 08-01	8	R1/8	7	24.5	14
PC 08-02		R1/4	9.5	24.5	14
PC 08-03		R3/8	10	22	17
PC 08-04		R1/2	13	25	21
PC 10-01	10	R1/8	7	29	17
PC 10-02		R1/4	9.5	31	17
PC 10-03		R3/8	10	28.5	17
PC 10-04		R1/2	13	26	21
PC 12-01	12	R1/8	7	30.5	20
PC 12-02		R1/4	9.5	32.5	20
PC 12-03		R3/8	10	29	20
PC 12-04		R1/2	13	27.5	21
PC 14-02	14	R1/4	9.5	33.5	24
PC 14-03		R3/8	10	34	24
PC 14-04		R1/2	13	35	24
PC 15-02	15	R1/4	9.5	33.5	24
PC 15-03		R3/8	10	34	24
PC 15-04		R1/2	13	35	24
PC 16-02	16	R1/4	9.5	33.5	24
PC 16-03		R3/8	10	34	24
PC 16-04		R1/2	13	35	24

* Information contained herein may be changed without prior notification.