


SPW Union Y Reducer - Stainless Steel Push to Connect Fittings

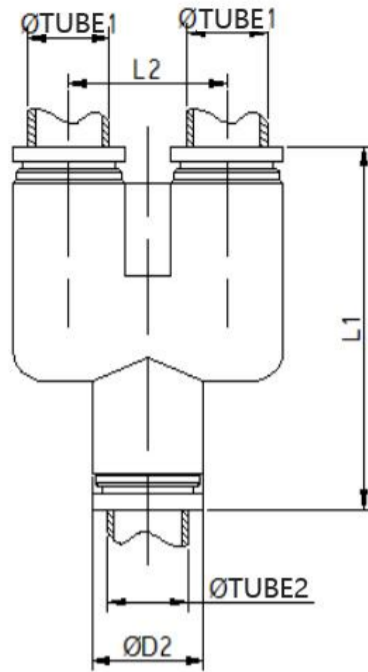

Material: 316 Stainless Steel
Fluid Admitted: Air, Water, Steam, and Other Liquid
Working Pressure: 0~2.0MPa | 0~290psi
Proof Pressure: 3.0Mpa | 435psi
Negative Pressure: -100Kpa | -29.5 In Hg
Working Temperature: 20~150°C | -4~302°F
Applicable Tube: PU / PA / Teflon Tubing
Seal, O-ring: FKM (Viton)

Metric / Inch Tubing Union Y Reducer Stainless Steel Push to Connect Fittings

PART NO.	Tube1 ØD	Tube2 ØD	L1(mm)	L2(mm)	D2(mm)
SPW 06-04	6	4	37.5	16	13
SPW 08-04	8	4	41.3	18	15
SPW 08-06	8	6	41.3	18	15
SPW 10-06	10	6	44.3	21	18
SPW 10-08	10	8	44.3	21	18
SPW 12-08	12	8	51	24	21
SPW 12-10	12	10	51	24	21
SPW 1/4-5/32	1/4"	5/32"	37.5	16	13
SPW 5/16-5/32	5/16"	5/32"	41.3	18	15
SPW 5/16-1/4	5/16"	1/4"	41.3	18	15
SPW 3/8-1/4	3/8"	1/4"	44.3	21	18
SPW 3/8-5/16	3/8"	5/16"	44.3	21	18
SPW 1/2-5/16	1/2"	5/16"	51	24	21
SPW 1/2-3/8	1/2"	3/8"	51	24	21