


## SPV Union Elbow - Stainless Steel Push to Connect Fittings

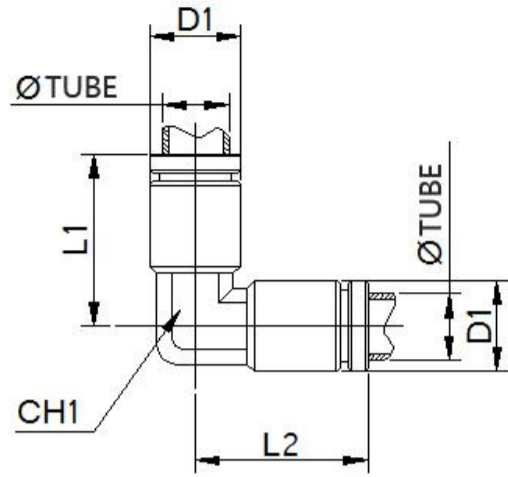

**Material:** 316 Stainless Steel  
**Fluid Admitted:** Air, Water, Steam, and Other Liquid  
**Working Pressure:** 0~2.0MPa | 0~290psi  
**Proof Pressure:** 3.0Mpa | 435psi  
**Negative Pressure:** -100Kpa | -29.5 In Hg  
**Working Temperature:** 20~150°C | -4~302°F  
**Applicable Tube:** PU / PA / Teflon Tubing  
**Seal, O-ring:** FKM (Viton)

### Metric / Inch Tubing Union Elbow Stainless Steel Push to Connect Fittings

PART NO.	Tube ØD	L1(mm)	L2(mm)	D2(mm)	CH1(mm)
SPV 04	4	17	17	9	9.2
SPV 06	6	19	19	11	9.2
SPV 08	8	22	22	13.6	11.2
SPV 10	10	26	26	15.6	13.2
SPV 12	12	29	29	18.6	15.5
SPV 14	14	31	31	20.6	20.6
SPV 16	16	35	35	22.6	20.6
SPV 5/32	5/32"	17	17	9	9.2
SPV 1/4	1/4"	19	19	11	9.2
SPV 5/16	5/16"	22	22	13.6	11.2
SPV 3/8	3/8"	26	26	15.6	13.2
SPV 1/2	1/2"	29	29	18.6	15.5