

PneuFlex[®]

PNEUFLEX PNEUMATIC CO., LTD

A Reliable Manufacturer...


Responsible for Customers...

Push in Fittings, One Touch Tube Fittings, Instant Fittings (PT, R, NPT)

Features

1. Quick installation, simple and flexible, space-saving.
2. The tube fitting comes in a wide variety of models to meet all your needs in pneumatic piping.
3. Even after installation, the direction of tubing can be changed freely.
4. The release ring adopts the ellipse design to make it more convenient and labor-saving for disconnection.
5. All taper threads are pre-coated with Teflon with fine seal performance.
6. All fittings are equipped with the internal hexagonal holes. It is easy for them to be mounted in the narrow places.

Structure

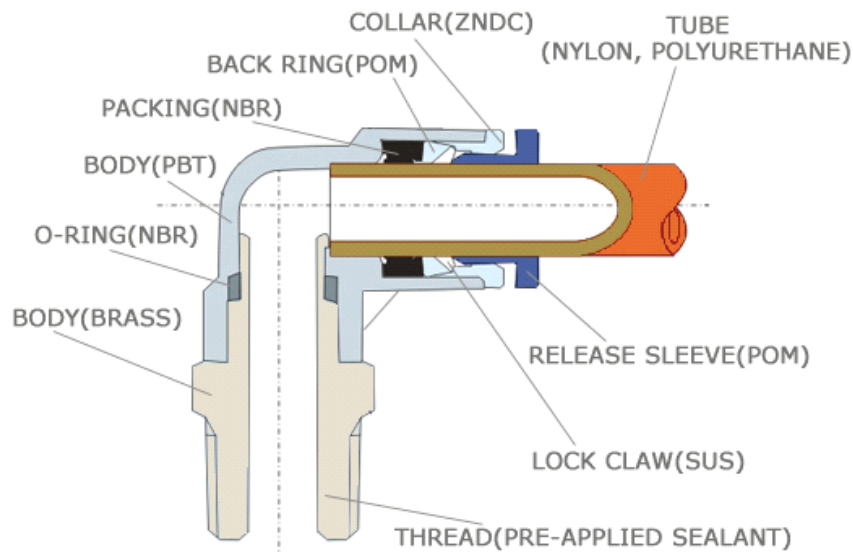

Specifications

Fluid Admitted	Air, Vacuum	
Working Pressure Range	0~1.0MPa	0~150 PSI
Negative Pressure	-100 KPa	-29.5 In Hg
Temperature Range	0~60°C	32~140°F
Applicable Tube	Polyurethane(PU) / Nylon(PA)	

PC 08 -- 02

(1) (2) (3)

(1) Model Type

(2) Tube O.D

Metric Tube								
Code	04	06	08	10	12	14	15	16
Tube O.D(mm)	4mm	6mm	8mm	10mm	12mm	14mm	15mm	16mm

Inch Tube						
Code	5/32	3/16	1/4	5/16	3/8	1/2
Tube O.D(Inch)	5/32"	3/16"	1/4"	5/16"	3/8"	1/2"

(3) Thread Type and Size

55° Taper Pipe Thread (R,PT,BSPT)				
Code	01	02	03	04
Size	R1/8	R1/4	R3/8	R1/2

60° American Standard Taper Pipe Thread (NPT)				
Code	N01	N02	N03	N04
Size	NPT1/8	NPT1/4	NPT3/8	NPT1/2

Metric Thread								
Code	M5	M6	M8	M10	M12	M14	M16	M20
Size	M5 X 0.8	M6 X 1	M8 X 1	M10 X 1	M12 X 1.25	M14 X 1.5	M16 X 1.5	M20 X 1.5

Model Type -- PC						
PC 04-M5	PC 08-01	PC 12-03	PC 5/32-01	PC 3/8-01	PC 5/32-N01	PC 3/8-N01
PC 04-M6	PC 08-02	PC 12-04	PC 5/32-02	PC 3/8-02	PC 5/32-N02	PC 3/8-N02
PC 04-01	PC 08-03	PC 14-02	PC 1/4-01	PC 3/8-03	PC 1/4-N01	PC 3/8-N03
PC 04-02	PC 08-04	PC 14-03	PC 1/4-02	PC 3/8-04	PC 1/4-N02	PC 3/8-N04
PC 06-M5	PC 10-01	PC 14-04	PC 1/4-03	PC 1/2-01	PC 1/4-N03	PC 1/2-N01
PC 06-M6	PC 10-02	PC 15-03	PC 1/4-04	PC 1/2-02	PC 1/4-N04	PC 1/2-N02
PC 06-01	PC 10-03	PC 15-04	PC 5/16-01	PC 1/2-03	PC 5/16-N01	PC 1/2-N03
PC 06-02	PC 10-04	PC 16-02	PC 5/16-02	PC 1/2-04	PC 5/16-N02	PC 1/2-N04
PC 06-03	PC 12-01	PC 16-03	PC 5/16-03		PC 5/16-N03	
PC 06-04	PC 12-02	PC 16-04	PC 5/16-04		PC 5/16-N04	



Male Straight



Hex. Male Straight

Model Type -- POC						
POC 04-M5	POC 08-01	POC 12-03	POC 5/32-01	POC 3/8-01	POC 5/32-N01	POC 3/8-N01
POC 04-M6	POC 08-02	POC 12-04	POC 5/32-02	POC 3/8-02	POC 5/32-N02	POC 3/8-N02
POC 04-01	POC 08-03	POC 14-02	POC 1/4-01	POC 3/8-03	POC 1/4-N01	POC 3/8-N03
POC 04-02	POC 08-04	POC 14-03	POC 1/4-02	POC 3/8-04	POC 1/4-N02	POC 3/8-N04
POC 06-M5	POC 10-01	POC 14-04	POC 1/4-03	POC 1/2-01	POC 1/4-N03	POC 1/2-N01
POC 06-M6	POC 10-02	POC 15-03	POC 1/4-04	POC 1/2-02	POC 1/4-N04	POC 1/2-N02
POC 06-01	POC 10-03	POC 15-04	POC 5/16-01	POC 1/2-03	POC 5/16-N01	POC 1/2-N03
POC 06-02	POC 10-04	POC 16-02	POC 5/16-02	POC 1/2-04	POC 5/16-N02	POC 1/2-N04
POC 06-03	POC 12-01	POC 16-03	POC 5/16-03		POC 5/16-N03	
POC 06-04	POC 12-02	POC 16-04	POC 5/16-04		POC 5/16-N04	



Male Elbow

Model Type -- PL						
PL 04-M5	PL 08-01	PL 12-03	PL 5/32-01	PL 3/8-01	PL 5/32-N01	PL 3/8-N01
PL 04-M6	PL 08-02	PL 12-04	PL 5/32-02	PL 3/8-02	PL 5/32-N02	PL 3/8-N02
PL 04-01	PL 08-03	PL 14-02	PL 1/4-01	PL 3/8-03	PL 1/4-N01	PL 3/8-N03
PL 04-02	PL 08-04	PL 14-03	PL 1/4-02	PL 3/8-04	PL 1/4-N02	PL 3/8-N04
PL 06-M5	PL 10-01	PL 14-04	PL 1/4-03	PL 1/2-01	PL 1/4-N03	PL 1/2-N01
PL 06-M6	PL 10-02	PL 15-03	PL 1/4-04	PL 1/2-02	PL 1/4-N04	PL 1/2-N02
PL 06-01	PL 10-03	PL 15-04	PL 5/16-01	PL 1/2-03	PL 5/16-N01	PL 1/2-N03
PL 06-02	PL 10-04	PL 16-02	PL 5/16-02	PL 1/2-04	PL 5/16-N02	PL 1/2-N04
PL 06-03	PL 12-01	PL 16-03	PL 5/16-03		PL 5/16-N03	
PL 06-04	PL 12-02	PL 16-04	PL 5/16-04		PL 5/16-N04	



Extended Male Elbow

Model Type -- PLL						
PLL 04-M5	PLL 08-01	PLL 12-03	PLL 5/32-01	PLL 3/8-01	PLL 5/32-N01	PLL 3/8-N01
PLL 04-M6	PLL 08-02	PLL 12-04	PLL 5/32-02	PLL 3/8-02	PLL 5/32-N02	PLL 3/8-N02
PLL 04-01	PLL 08-03	PLL 14-02	PLL 1/4-01	PLL 3/8-03	PLL 1/4-N01	PLL 3/8-N03
PLL 04-02	PLL 08-04	PLL 14-03	PLL 1/4-02	PLL 3/8-04	PLL 1/4-N02	PLL 3/8-N04
PLL 06-M5	PLL 10-01	PLL 14-04	PLL 1/4-03	PLL 1/2-01	PLL 1/4-N03	PLL 1/2-N01
PLL 06-M6	PLL 10-02	PLL 15-03	PLL 1/4-04	PLL 1/2-02	PLL 1/4-N04	PLL 1/2-N02
PLL 06-01	PLL 10-03	PLL 15-04	PLL 5/16-01	PLL 1/2-03	PLL 5/16-N01	PLL 1/2-N03
PLL 06-02	PLL 10-04	PLL 16-02	PLL 5/16-02	PLL 1/2-04	PLL 5/16-N02	PLL 1/2-N04
PLL 06-03	PLL 12-01	PLL 16-03	PLL 5/16-03		PLL 5/16-N03	
PLL 06-04	PLL 12-02	PLL 16-04	PLL 5/16-04		PLL 5/16-N04	



Female Elbow

Model Type -- PLF						
PLF 04-M5	PLF 08-01	PLF 12-03	PLF 5/32-01	PLF 3/8-01	PLF 5/32-N01	PLF 3/8-N01
PLF 04-M6	PLF 08-02	PLF 12-04	PLF 5/32-02	PLF 3/8-02	PLF 5/32-N02	PLF 3/8-N02
PLF 04-01	PLF 08-03	PLF 14-02	PLF 1/4-01	PLF 3/8-03	PLF 1/4-N01	PLF 3/8-N03
PLF 04-02	PLF 08-04	PLF 14-03	PLF 1/4-02	PLF 3/8-04	PLF 1/4-N02	PLF 3/8-N04
PLF 06-M5	PLF 10-01	PLF 14-04	PLF 1/4-03	PLF 1/2-01	PLF 1/4-N03	PLF 1/2-N01
PLF 06-M6	PLF 10-02	PLF 15-03	PLF 1/4-04	PLF 1/2-02	PLF 1/4-N04	PLF 1/2-N02
PLF 06-01	PLF 10-03	PLF 15-04	PLF 5/16-01	PLF 1/2-03	PLF 5/16-N01	PLF 1/2-N03
PLF 06-02	PLF 10-04	PLF 16-02	PLF 5/16-02	PLF 1/2-04	PLF 5/16-N02	PLF 1/2-N04
PLF 06-03	PLF 12-01	PLF 16-03	PLF 5/16-03		PLF 5/16-N03	
PLF 06-04	PLF 12-02	PLF 16-04	PLF 5/16-04		PLF 5/16-N04	



Bulkhead Union Elbow

Model Type -- PCF						
PCF 04-M5	PCF 08-01	PCF 12-03	PCF 5/32-01	PCF 3/8-01	PCF 5/32-N01	PCF 3/8-N01
PCF 04-M6	PCF 08-02	PCF 12-04	PCF 5/32-02	PCF 3/8-02	PCF 5/32-N02	PCF 3/8-N02
PCF 04-01	PCF 08-03	PCF 14-02	PCF 1/4-01	PCF 3/8-03	PCF 1/4-N01	PCF 3/8-N03
PCF 04-02	PCF 08-04	PCF 14-03	PCF 1/4-02	PCF 3/8-04	PCF 1/4-N02	PCF 3/8-N04
PCF 06-M5	PCF 10-01	PCF 14-04	PCF 1/4-03	PCF 1/2-01	PCF 1/4-N03	PCF 1/2-N01
PCF 06-M6	PCF 10-02	PCF 15-03	PCF 1/4-04	PCF 1/2-02	PCF 1/4-N04	PCF 1/2-N02
PCF 06-01	PCF 10-03	PCF 15-04	PCF 5/16-01	PCF 1/2-03	PCF 5/16-N01	PCF 1/2-N03
PCF 06-02	PCF 10-04	PCF 16-02	PCF 5/16-02	PCF 1/2-04	PCF 5/16-N02	PCF 1/2-N04
PCF 06-03	PCF 12-01	PCF 16-03	PCF 5/16-03		PCF 5/16-N03	
PCF 06-04	PCF 12-02	PCF 16-04	PCF 5/16-04		PCF 5/16-N04	



Male Branch Tee

Model Type -- PB						
PB 04-M5	PB 08-01	PB 12-03	PB 5/32-01	PB 3/8-01	PB 5/32-N01	PB 3/8-N01
PB 04-M6	PB 08-02	PB 12-04	PB 5/32-02	PB 3/8-02	PB 5/32-N02	PB 3/8-N02
PB 04-01	PB 08-03	PB 14-02	PB 1/4-01	PB 3/8-03	PB 1/4-N01	PB 3/8-N03
PB 04-02	PB 08-04	PB 14-03	PB 1/4-02	PB 3/8-04	PB 1/4-N02	PB 3/8-N04
PB 06-M5	PB 10-01	PB 14-04	PB 1/4-03	PB 1/2-01	PB 1/4-N03	PB 1/2-N01
PB 06-M6	PB 10-02	PB 15-03	PB 1/4-04	PB 1/2-02	PB 1/4-N04	PB 1/2-N02
PB 06-01	PB 10-03	PB 15-04	PB 5/16-01	PB 1/2-03	PB 5/16-N01	PB 1/2-N03
PB 06-02	PB 10-04	PB 16-02	PB 5/16-02	PB 1/2-04	PB 5/16-N02	PB 1/2-N04
PB 06-03	PB 12-01	PB 16-03	PB 5/16-03		PB 5/16-N03	
PB 06-04	PB 12-02	PB 16-04	PB 5/16-04		PB 5/16-N04	



Female Branch Tee

Model Type -- PBF						
PBF 04-M5	PBF 08-01	PBF 12-03	PBF 5/32-01	PBF 3/8-01	PBF 5/32-N01	PBF 3/8-N01
PBF 04-M6	PBF 08-02	PBF 12-04	PBF 5/32-02	PBF 3/8-02	PBF 5/32-N02	PBF 3/8-N02
PBF 04-01	PBF 08-03	PBF 14-02	PBF 1/4-01	PBF 3/8-03	PBF 1/4-N01	PBF 3/8-N03
PBF 04-02	PBF 08-04	PBF 14-03	PBF 1/4-02	PBF 3/8-04	PBF 1/4-N02	PBF 3/8-N04
PBF 06-M5	PBF 10-01	PBF 14-04	PBF 1/4-03	PBF 1/2-01	PBF 1/4-N03	PBF 1/2-N01
PBF 06-M6	PBF 10-02	PBF 15-03	PBF 1/4-04	PBF 1/2-02	PBF 1/4-N04	PBF 1/2-N02
PBF 06-01	PBF 10-03	PBF 15-04	PBF 5/16-01	PBF 1/2-03	PBF 5/16-N01	PBF 1/2-N03
PBF 06-02	PBF 10-04	PBF 16-02	PBF 5/16-02	PBF 1/2-04	PBF 5/16-N02	PBF 1/2-N04
PBF 06-03	PBF 12-01	PBF 16-03	PBF 5/16-03		PBF 5/16-N03	
PBF 06-04	PBF 12-02	PBF 16-04	PBF 5/16-04		PBF 5/16-N04	



Male Run Tee

Model Type -- PD						
PD 04-M5	PD 08-01	PD 12-03	PD 5/32-01	PD 3/8-01	PD 5/32-N01	PD 3/8-N01
PD 04-M6	PD 08-02	PD 12-04	PD 5/32-02	PD 3/8-02	PD 5/32-N02	PD 3/8-N02
PD 04-01	PD 08-03	PD 14-02	PD 1/4-01	PD 3/8-03	PD 1/4-N01	PD 3/8-N03
PD 04-02	PD 08-04	PD 14-03	PD 1/4-02	PD 3/8-04	PD 1/4-N02	PD 3/8-N04
PD 06-M5	PD 10-01	PD 14-04	PD 1/4-03	PD 1/2-01	PD 1/4-N03	PD 1/2-N01
PD 06-M6	PD 10-02	PD 15-03	PD 1/4-04	PD 1/2-02	PD 1/4-N04	PD 1/2-N02
PD 06-01	PD 10-03	PD 15-04	PD 5/16-01	PD 1/2-03	PD 5/16-N01	PD 1/2-N03
PD 06-02	PD 10-04	PD 16-02	PD 5/16-02	PD 1/2-04	PD 5/16-N02	PD 1/2-N04
PD 06-03	PD 12-01	PD 16-03	PD 5/16-03		PD 5/16-N03	
PD 06-04	PD 12-02	PD 16-04	PD 5/16-04		PD 5/16-N04	



Female Run Tee

Model Type -- PDF						
PDF 04-M5	PDF 08-01	PDF 12-03	PDF 5/32-01	PDF 3/8-01	PDF 5/32-N01	PDF 3/8-N01
PDF 04-M6	PDF 08-02	PDF 12-04	PDF 5/32-02	PDF 3/8-02	PDF 5/32-N02	PDF 3/8-N02
PDF 04-01	PDF 08-03	PDF 14-02	PDF 1/4-01	PDF 3/8-03	PDF 1/4-N01	PDF 3/8-N03
PDF 04-02	PDF 08-04	PDF 14-03	PDF 1/4-02	PDF 3/8-04	PDF 1/4-N02	PDF 3/8-N04
PDF 06-M5	PDF 10-01	PDF 14-04	PDF 1/4-03	PDF 1/2-01	PDF 1/4-N03	PDF 1/2-N01
PDF 06-M6	PDF 10-02	PDF 15-03	PDF 1/4-04	PDF 1/2-02	PDF 1/4-N04	PDF 1/2-N02
PDF 06-01	PDF 10-03	PDF 15-04	PDF 5/16-01	PDF 1/2-03	PDF 5/16-N01	PDF 1/2-N03
PDF 06-02	PDF 10-04	PDF 16-02	PDF 5/16-02	PDF 1/2-04	PDF 5/16-N02	PDF 1/2-N04
PDF 06-03	PDF 12-01	PDF 16-03	PDF 5/16-03		PDF 5/16-N03	
PDF 06-04	PDF 12-02	PDF 16-04	PDF 5/16-04		PDF 5/16-N04	



Male Y

Model Type -- PX						
PX 04-M5	PX 08-01	PX 12-03	PX 5/32-01	PX 3/8-01	PX 5/32-N01	PX 3/8-N01
PX 04-M6	PX 08-02	PX 12-04	PX 5/32-02	PX 3/8-02	PX 5/32-N02	PX 3/8-N02
PX 04-01	PX 08-03	PX 14-02	PX 1/4-01	PX 3/8-03	PX 1/4-N01	PX 3/8-N03
PX 04-02	PX 08-04	PX 14-03	PX 1/4-02	PX 3/8-04	PX 1/4-N02	PX 3/8-N04
PX 06-M5	PX 10-01	PX 14-04	PX 1/4-03	PX 1/2-01	PX 1/4-N03	PX 1/2-N01
PX 06-M6	PX 10-02	PX 15-03	PX 1/4-04	PX 1/2-02	PX 1/4-N04	PX 1/2-N02
PX 06-01	PX 10-03	PX 15-04	PX 5/16-01	PX 1/2-03	PX 5/16-N01	PX 1/2-N03
PX 06-02	PX 10-04	PX 16-02	PX 5/16-02	PX 1/2-04	PX 5/16-N02	PX 1/2-N04
PX 06-03	PX 12-01	PX 16-03	PX 5/16-03		PX 5/16-N03	
PX 06-04	PX 12-02	PX 16-04	PX 5/16-04		PX 5/16-N04	



Female Y

Model Type -- PXF						
PXF 04-M5	PXF 08-01	PXF 12-03	PXF 5/32-01	PXF 3/8-01	PXF 5/32-N01	PXF 3/8-N01
PXF 04-M6	PXF 08-02	PXF 12-04	PXF 5/32-02	PXF 3/8-02	PXF 5/32-N02	PXF 3/8-N02
PXF 04-01	PXF 08-03	PXF 14-02	PXF 1/4-01	PXF 3/8-03	PXF 1/4-N01	PXF 3/8-N03
PXF 04-02	PXF 08-04	PXF 14-03	PXF 1/4-02	PXF 3/8-04	PXF 1/4-N02	PXF 3/8-N04
PXF 06-M5	PXF 10-01	PXF 14-04	PXF 1/4-03	PXF 1/2-01	PXF 1/4-N03	PXF 1/2-N01
PXF 06-M6	PXF 10-02	PXF 15-03	PXF 1/4-04	PXF 1/2-02	PXF 1/4-N04	PXF 1/2-N02
PXF 06-01	PXF 10-03	PXF 15-04	PXF 5/16-01	PXF 1/2-03	PXF 5/16-N01	PXF 1/2-N03
PXF 06-02	PXF 10-04	PXF 16-02	PXF 5/16-02	PXF 1/2-04	PXF 5/16-N02	PXF 1/2-N04
PXF 06-03	PXF 12-01	PXF 16-03	PXF 5/16-03		PXF 5/16-N03	
PXF 06-04	PXF 12-02	PXF 16-04	PXF 5/16-04		PXF 5/16-N04	



Male Triple Branch

Model Type -- PKB						
PKB 04-M5	PKB 08-01	PKB 12-03	PKB 5/32-01	PKB 3/8-01	PKB 5/32-N01	PKB 3/8-N01
PKB 04-M6	PKB 08-02	PKB 12-04	PKB 5/32-02	PKB 3/8-02	PKB 5/32-N02	PKB 3/8-N02
PKB 04-01	PKB 08-03	PKB 14-02	PKB 1/4-01	PKB 3/8-03	PKB 1/4-N01	PKB 3/8-N03
PKB 04-02	PKB 08-04	PKB 14-03	PKB 1/4-02	PKB 3/8-04	PKB 1/4-N02	PKB 3/8-N04
PKB 06-M5	PKB 10-01	PKB 14-04	PKB 1/4-03	PKB 1/2-01	PKB 1/4-N03	PKB 1/2-N01
PKB 06-M6	PKB 10-02	PKB 15-03	PKB 1/4-04	PKB 1/2-02	PKB 1/4-N04	PKB 1/2-N02
PKB 06-01	PKB 10-03	PKB 15-04	PKB 5/16-01	PKB 1/2-03	PKB 5/16-N01	PKB 1/2-N03
PKB 06-02	PKB 10-04	PKB 16-02	PKB 5/16-02	PKB 1/2-04	PKB 5/16-N02	PKB 1/2-N04
PKB 06-03	PKB 12-01	PKB 16-03	PKB 5/16-03		PKB 5/16-N03	
PKB 06-04	PKB 12-02	PKB 16-04	PKB 5/16-04		PKB 5/16-N04	



Male Re-Triple Branch

Model Type -- PKD		
PKD 06-04-01	PKD 3/16-5/32-01	PKD 3/16-5/32-N01
PKD 06-04-02	PKD 1/4-5/32-01	PKD 1/4-5/32-N01
PKD 08-04-01	PKD 5/16-5/32-02	PKD 5/16-5/32-N02
PKD 08-04-02	PKD 5/16-3/16-02	PKD 5/16-3/16-N02
PKD 08-06-01	PKD 5/16-1/4-02	PKD 5/16-1/4-N02
PKD 08-06-02	PKD 3/8-1/4-03	PKD 3/8-1/4-N03
PKD 10-06-02	PKD 3/8-5/16-03	PKD 3/8-5/16-N03
PKD 10-06-03		
PKD 10-08-02		
PKD 10-08-03		



Male Banjo

Model Type -- PH						
PH 04-M5	PH 08-01	PH 12-03	PH 5/32-01	PH 3/8-01	PH 5/32-N01	PH 3/8-N01
PH 04-M6	PH 08-02	PH 12-04	PH 5/32-02	PH 3/8-02	PH 5/32-N02	PH 3/8-N02
PH 04-01	PH 08-03	PH 14-02	PH 1/4-01	PH 3/8-03	PH 1/4-N01	PH 3/8-N03
PH 04-02	PH 08-04	PH 14-03	PH 1/4-02	PH 3/8-04	PH 1/4-N02	PH 3/8-N04
PH 06-M5	PH 10-01	PH 14-04	PH 1/4-03	PH 1/2-01	PH 1/4-N03	PH 1/2-N01
PH 06-M6	PH 10-02	PH 15-03	PH 1/4-04	PH 1/2-02	PH 1/4-N04	PH 1/2-N02
PH 06-01	PH 10-03	PH 15-04	PH 5/16-01	PH 1/2-03	PH 5/16-N01	PH 1/2-N03
PH 06-02	PH 10-04	PH 16-02	PH 5/16-02	PH 1/2-04	PH 5/16-N02	PH 1/2-N04
PH 06-03	PH 12-01	PH 16-03	PH 5/16-03		PH 5/16-N03	
PH 06-04	PH 12-02	PH 16-04	PH 5/16-04		PH 5/16-N04	



Female Banjo

Model Type -- PHF						
PHF 04-M5	PHF 08-01	PHF 12-03	PHF 5/32-01	PHF 3/8-01	PHF 5/32-N01	PHF 3/8-N01
PHF 04-M6	PHF 08-02	PHF 12-04	PHF 5/32-02	PHF 3/8-02	PHF 5/32-N02	PHF 3/8-N02
PHF 04-01	PHF 08-03	PHF 14-02	PHF 1/4-01	PHF 3/8-03	PHF 1/4-N01	PHF 3/8-N03
PHF 04-02	PHF 08-04	PHF 14-03	PHF 1/4-02	PHF 3/8-04	PHF 1/4-N02	PHF 3/8-N04
PHF 06-M5	PHF 10-01	PHF 14-04	PHF 1/4-03	PHF 1/2-01	PHF 1/4-N03	PHF 1/2-N01
PHF 06-M6	PHF 10-02	PHF 15-03	PHF 1/4-04	PHF 1/2-02	PHF 1/4-N04	PHF 1/2-N02
PHF 06-01	PHF 10-03	PHF 15-04	PHF 5/16-01	PHF 1/2-03	PHF 5/16-N01	PHF 1/2-N03
PHF 06-02	PHF 10-04	PHF 16-02	PHF 5/16-02	PHF 1/2-04	PHF 5/16-N02	PHF 1/2-N04
PHF 06-03	PHF 12-01	PHF 16-03	PHF 5/16-03		PHF 5/16-N03	
PHF 06-04	PHF 12-02	PHF 16-04	PHF 5/16-04		PHF 5/16-N04	



Bulkhead Female Straight

Model Type -- PMF						
PMF 04-M5	PMF 08-01	PMF 12-03	PMF 5/32-01	PMF 3/8-01	PMF 5/32-N01	PMF 3/8-N01
PMF 04-M6	PMF 08-02	PMF 12-04	PMF 5/32-02	PMF 3/8-02	PMF 5/32-N02	PMF 3/8-N02
PMF 04-01	PMF 08-03	PMF 14-02	PMF 1/4-01	PMF 3/8-03	PMF 1/4-N01	PMF 3/8-N03
PMF 04-02	PMF 08-04	PMF 14-03	PMF 1/4-02	PMF 3/8-04	PMF 1/4-N02	PMF 3/8-N04
PMF 06-M5	PMF 10-01	PMF 14-04	PMF 1/4-03	PMF 1/2-01	PMF 1/4-N03	PMF 1/2-N01
PMF 06-M6	PMF 10-02	PMF 15-03	PMF 1/4-04	PMF 1/2-02	PMF 1/4-N04	PMF 1/2-N02
PMF 06-01	PMF 10-03	PMF 15-04	PMF 5/16-01	PMF 1/2-03	PMF 5/16-N01	PMF 1/2-N03
PMF 06-02	PMF 10-04	PMF 16-02	PMF 5/16-02	PMF 1/2-04	PMF 5/16-N02	PMF 1/2-N04
PMF 06-03	PMF 12-01	PMF 16-03	PMF 5/16-03		PMF 5/16-N03	
PMF 06-04	PMF 12-02	PMF 16-04	PMF 5/16-04		PMF 5/16-N04	



Union Straight

Model Type -- PU	
PU 04	PU 5/32
PU 05	PU 1/4
PU 06	PU 5/16
PU 08	PU 3/8
PU 10	PU 1/2
PU 11	
PU 12	
PU 14	
PU 15	
PU 16	



Union Reducer

Model Type -- PG	
PG 06-04	PG 3/16-5/32
PG 08-04	PG 1/4-5/32
PG 08-06	PG 1/4-3/16
PG 10-04	PG 5/16-5/32
PG 10-06	PG 5/16-1/4
PG 10-08	PG 3/8-1/4
PG 12-06	PG 3/8-5/16
PG 12-08	PG 1/2-3/8
PG 12-10	



Union Elbow

Model Type -- PV	
PV 04	PV 5/32
PV 05	PV 1/4
PV 06	PV 5/16
PV 08	PV 3/8
PV 10	PV 1/2
PV 11	
PV 12	
PV 14	
PV 15	
PV 16	



Union Elbow Reducer

Model Type -- PVG	
PVG 06-04	PVG 3/16-5/32
PVG 08-04	PVG 1/4-5/32
PVG 08-06	PVG 1/4-3/16
PVG 10-04	PVG 5/16-5/32
PVG 10-06	PVG 5/16-1/4
PVG 10-08	PVG 3/8-1/4
PVG 12-06	PVG 3/8-5/16
PVG 12-08	PVG 1/2-3/8
PVG 12-10	



Union Tee

Model Type -- PE	
PE 04	PE 5/32
PE 06	PE 1/4
PE 08	PE 5/16
PE 10	PE 3/8
PE 12	PE 1/2
PE 14	
PE 15	
PE 16	



Union Elbow Reducer

Model Type -- PEG	
PEG 06-04	PEG 1/4-5/32
PEG 08-06	PEG 5/16-1/4
PEG 10-08	PEG 3/8-5/16
PEG 12-10	PEG 1/2-3/8



Union Elbow Reducer

Model Type -- PGE	
PGE 06-04	PGE 1/4-5/32
PGE 08-06	PGE 5/16-1/4
PGE 10-08	PGE 3/8-5/16
PGE 12-10	PGE 1/2-3/8



Union Y

Model Type -- PY	
PY 04	PY 5/32
PY 06	PY 1/4
PY 08	PY 5/16
PY 10	PY 3/8
PY 12	PY 1/2
PY 14	
PY 15	
PY 16	



Reducer Y

Model Type -- PW	
PW 06-04	PW 1/4-5/32
PW 08-06	PW 5/16-1/4
PW 10-08	PW 3/8-5/16
PW 12-10	PW 1/2-3/8



Plug-in Reducer

Model Type -- PGJ	
PGJ 06-04	PGJ 3/16-5/32
PGJ 08-04	PGJ 1/4-5/32
PGJ 08-06	PGJ 1/4-3/16
PGJ 10-04	PGJ 5/16-5/32
PGJ 10-06	PGJ 5/16-1/4
PGJ 10-08	PGJ 3/8-1/4
PGJ 12-06	PGJ 3/8-5/16
PGJ 12-08	PGJ 1/2-3/8
PGJ 12-10	



Plug-in Elbow

Model Type -- PLJ	
PLJ 04	PLJ 5/32
PLJ 06	PLJ 1/4
PLJ 08	PLJ 5/16
PLJ 10	PLJ 3/8
PLJ 12	PLJ 1/2



Plug-in Y

Model Type -- PYJ	
PYJ 04	PYJ 5/32
PYJ 06	PYJ 1/4
PYJ 08	PYJ 5/16
PYJ 10	PYJ 3/8
PYJ 12	PYJ 1/2



Plug-in Reducer Y

Model Type -- PWJ	
PWJ 06-04	PWJ 1/4-5/32
PWJ 08-06	PWJ 5/16-1/4
PWJ 10-08	PWJ 3/8-5/16
PWJ 12-10	PWJ 1/2-3/8



Tube Splicer

Model Type -- PIJ	
PIJ 04	PIJ 5/32
PIJ 06	PIJ 1/4
PIJ 08	PIJ 5/16
PIJ 10	PIJ 3/8
PIJ 12	PIJ 1/2
PIJ 14	
PIJ 15	
PIJ 16	



Reducer Tube Splicer

Model Type -- PIG	
PIG 06-04	PIG 3/16-5/32
PIG 08-04	PIG 1/4-5/32
PIG 08-06	PIG 1/4-3/16
PIG 10-04	PIG 5/16-5/32
PIG 10-06	PIG 5/16-1/4
PIG 10-08	PIG 3/8-1/4
PIG 12-06	PIG 3/8-5/16
PIG 12-08	PIG 1/2-3/8
PIG 12-10	



Plug-in Reducer Triple Branch

Model Type -- PKJ	
PKJ 06-04	PKJ 1/4-5/32
PKJ 08-06	PKJ 5/16-1/4
PKJ 10-08	PKJ 3/8-5/16
PIKJ 12-10	PKJ 1/2-3/8



Plug

Model Type -- PP	
PP 04	PP 5/32
PP 06	PP 1/4
PP 08	PP 5/16
PP 10	PP 3/8
PP 12	PP 1/2



Bulkhead Union

Model Type -- PM	
PM 04	PM 5/32
PM 06	PM 1/4
PM 08	PM 5/16
PM 10	PM 3/8
PM 12	PM 1/2



Union Cross

Model Type -- PZA	
PZA 04	PZA 5/32
PZA 06	PZA 1/4
PZA 08	PZA 5/16
PZA 10	PZA 3/8
PZA 12	PZA 1/2



Union Tee

Model Type -- PK	
PK 04	PK 5/32
PK 06	PK 1/4
PK 08	PK 5/16
PK 10	PK 3/8
PK 12	PK 1/2



Triple Branch Union

Model Type -- PKG	
PKG 06-04	PKG 1/4-5/32
PKG 08-06	PKG 5/16-1/4
PKG 10-08	PKG 3/8-5/16
PKG 12-10	PKG 1/2-3/8